




Silver finish




A Electromechanical concealed overhead door closer

- **Specification:** Concealed cam action overhead door closer
- Suitable for doors up to 1100 mm wide and 130 kg weight
- Suitable for doors over 40 mm thick
- Adjustable closing force and latching action
- Hydraulic backcheck
- Non handed
- Minimum door width 633 mm
- All adjustments on top of closer
- Operating voltage 24V DC \pm 10%
- Connecting load 100mA
- Requires suitable power supply (see page 31)
- Hold open angle infinitely variable between 80-120 degrees
- **Certifire approved, CF242**
- Aluminium body and channel. Steel arm

Conforms to BS EN 1155

Size	Max. door width	Min. closing moments
2	850 mm	13 Nm
3	950 mm	18 Nm
4	1100 mm	26 Nm

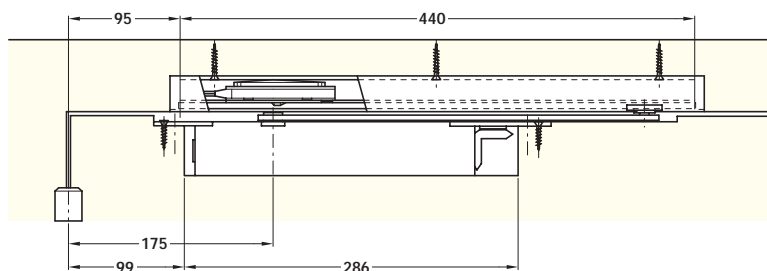

Finish	Cat. No.
Silver	931.14.329

Packing: 1 pc

B Timber fire door kit


- Intumescent material

Cat. No.	931.14.924
----------	------------

Packing: 1 pc



Silver finish




C Electromechanical concealed overhead door closer

- **Specification:** Concealed cam action overhead door closer
- Suitable for doors up to 1400 mm wide and 180 kg weight
- Suitable for doors over 50 mm thick
- Adjustable closing force and latching action
- Hydraulic backcheck
- Non handed
- Minimum door width 633 mm
- All adjustments on top of closer
- Operating voltage 24V DC \pm 10%
- Connecting load 100mA
- Requires suitable power supply (see page 31)
- Hold open angle infinitely variable between 80-120 degrees
- **Certifire approved, CF242**
- Aluminium body and channel. Steel arm

Conforms to BS EN 1155

Size	Max. door width	Min. closing moments
3	950 mm	18 Nm
4	1100 mm	26 Nm
5	1250 mm	37 Nm
6	1400 mm	54 Nm

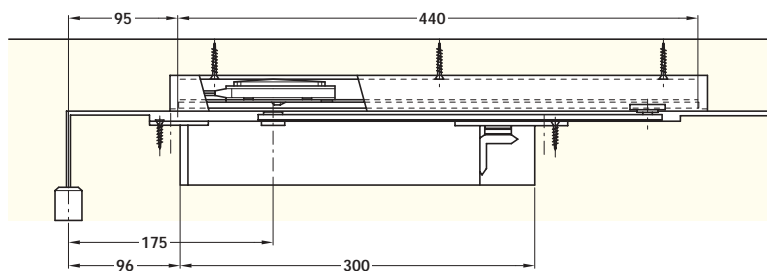

Finish	Cat. No.
Silver	931.14.359

Packing: 1 pc

D Timber fire door kit

- Intumescent material

Cat. No.	931.14.923
----------	------------

Packing: 1 pc

Dimensions in mm

We reserve the right to alter specifications without notice.