



# Fittings to Aid Disabled Persons

## Lever Handle Sets

This door set is designed for use on single swing or sliding doors



**Text and drawings shown left reverted back to same as original printed page.**



**Item A.**  
Text reverted back to say "Photo shows right hand door set"


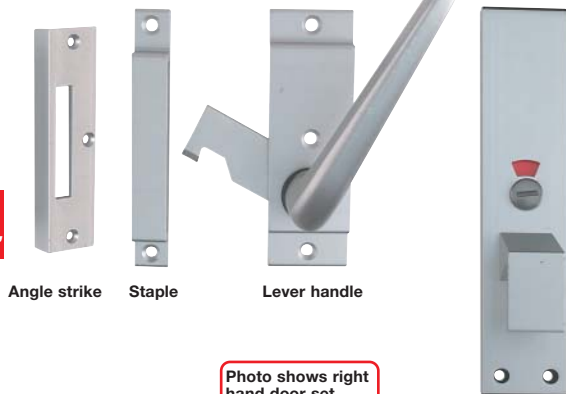




Photo shows right hand door set

Indicator with emergency release


Illustration shows left hand door set

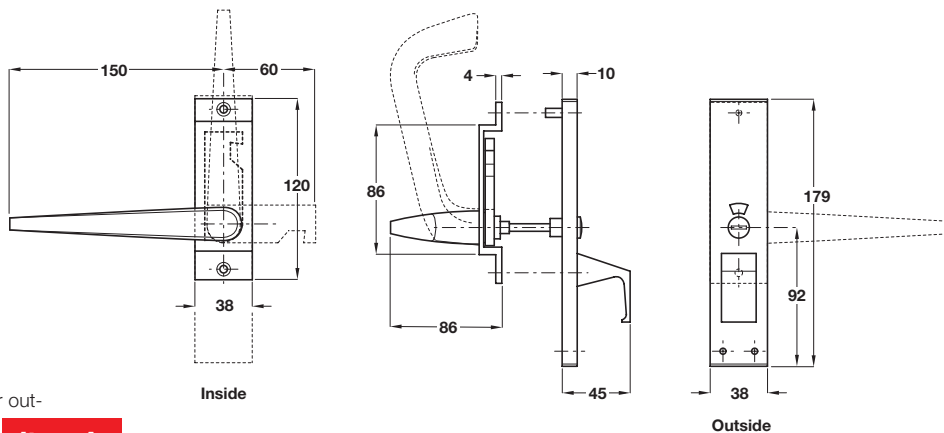

**Item A.**  
Text added

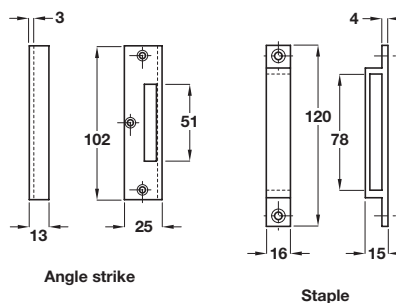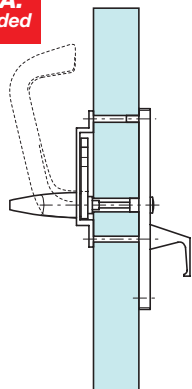

5



### A 'Facility' door set

- For use on disabled toilets, to suit inward or outward opening swing doors or sliding doors
- Handed
- For min 20 - max 44 mm door thickness
- Comprises
  - Larger lever handle
  - Indicator with emergency release
  - Angle strike
  - Staple
  - Bolt through fixings
- Choice of keeps included:
  - Angle strike for outward opening single swing doors or for straight sliding doors
  - Staple for inward opening single swing doors
- Anodised aluminium

| Finish | Left hand  | Right hand |
|--------|------------|------------|
| Satin  | 980.08.010 | 980.08.011 |

Order qty: 1 set

Tactile signage is shown in Section 4, page 6

For further information on special signage, please contact our sales office.

### B WC graphic signs

- Ø 75 mm x 2 mm
- Silk screened symbol
- Drilled and countersunk
- Fixing screws included
- Aluminium



| Finish            | Disabled   | Male       | Female     |
|-------------------|------------|------------|------------|
| Polished anodised | 987.15.409 | 987.15.209 | 987.15.309 |

Order qty: 1 pc

05.07.10/4\*