

Steel Butt Hinges HI-LOAD Range

These hinges have obtained Certifire approval.
Maintenance free, 25 year performance guarantee.
All fixings for timber included.

Projection hinges also available in mild steel - refer to page 21

Projection hinge guide shown on page 4

Refer to pages 2-3 for information on BS EN 1935, hinge grades and classification.

HI-LOAD hinges product guide: page 17

BS EN 1935



A Steel hinge, 3 knuckle, fixed pin


- Grade **11** BS EN 1935
- Maximum adjusted door weight **80 kg**
- Minimum door thickness **35 mm**
- Square corners
- Maintenance free
- **25** year performance guarantee
- Certifire CF209 approved for fire doors
- M5 x 30 mm wood screws included
- Mild steel, colour coated

Length x width	100 x 75 mm
Square corners	926.88.1**


Order qty: 1 pc

Colours available (to order)


Finish	Similar to	Colour no.
Red	RAL 3003	12
Black	RAL 9005	13
Dark grey	RAL 7038	18
White	RAL 9003	19
Yellow	RAL 1004	22
Dark	RAL 5003	37

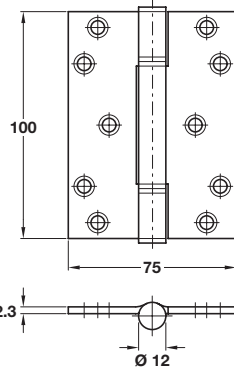

RT

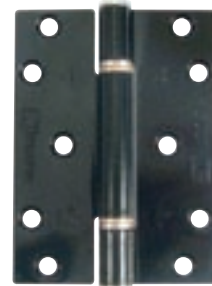

Black colour coated finish shown

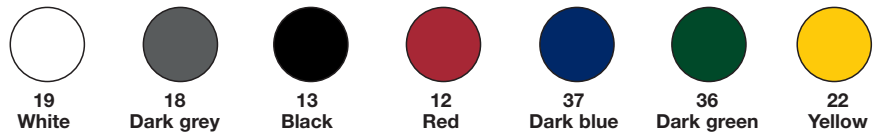

BS EN 1935




B Steel hinge, 3 knuckle, projection, fixed pin

- Grade **13** BS EN 1935
- Maximum adjusted door weight **120 kg**
- Minimum door thickness **44 mm**
- Maximum clearance **40 mm**
- Square corners
- Maintenance free
- **25** year performance guarantee
- Certifire CF209 approved for fire doors
- M5 x 30 mm wood screws included
- Mild steel

Length x width	100 x 106 mm
Finish	Bright zinc
Cat. No.	926.88.335

Order qty: 1 pc

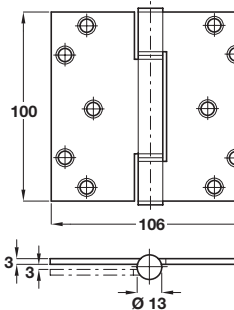

RT



BS EN 1935




C Steel hinge, 3 knuckle, projection, fixed pin

- Grade **13** BS EN 1935
- Maximum adjusted door weight **120 kg**
- Minimum door thickness **44 mm**
- Maximum clearance **58 mm**
- Square corners
- Maintenance free
- **25** year performance guarantee
- Certifire CF209 approved for fire doors
- M5 x 30 mm wood screws included
- Mild steel

Length x width	100 x 124 mm
Finish	Bright zinc
Cat. No.	926.88.175

Order qty: 1 pc

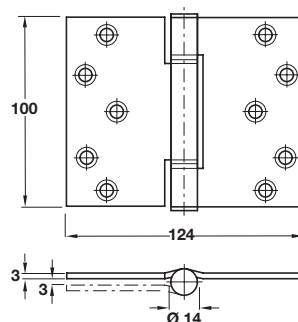

RT

