

Concealed Mortise Hinges


Tectus 3D Adjustable

A Tectus 520 3D hinge

- Maximum adjusted door weight **100 kg**
- For 60 minute fire rating order intumescent kit (item **B**) separately
- Opening angle 180°
- 3-way adjustment:
Vertical: **± 3 mm**
Horizontal: **± 3 mm**
Depth: **± 1 mm**
- Suitable for left or right hand applications
- Maintenance free slide bearings
- Fixing screws included for frame, not for door part
- Stainless steel

Finish	Cat. No.
Satin stainless steel	● 924.02.233

Order qty: 1 pc **Discontinued - No longer available**
For 924.02.233 use alt. no. 924.16.403

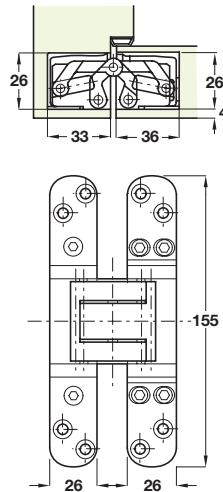

Discontinued ●
Discontinued when stock = 0 +



Satin stainless steel finish shown

B Intumescent kit to suit Tectus 520 hinges

- Upgrades hinge to 60 minute fire rating
- Intumescent material, white, 1 mm thick

Cat. No.	● 924.02.291
----------	--------------

Order qty: 1 pc **Discontinued**
924.02.291 - No longer available


C Tectus 510 3D hinge

- Maximum adjusted door weight **100 kg**
- For 30 minute fire rating order intumescent kit (item **D**) separately
- Opening angle 180°
- 3-way adjustment:
Vertical: **± 3 mm**
Horizontal: **± 3 mm**
Depth: **± 1 mm**
- Suitable for left or right hand applications
- Maintenance free slide bearings
- Fixing screws included for frame, not for door part
- Aluminium, zinc diecast and steel

Finish	Cat. No.
Matt nickel F2	● 924.02.222
Dull chrome F1	● 924.02.204
Polished nickel	● 924.02.270

Order qty: 1 pc

Discontinued
- No longer available
For 924.02.222 use alt. no. 924.17.222
For 924.02.204 use alt. no. 924.17.221
For 924.02.270 use alt. no. 924.17.270

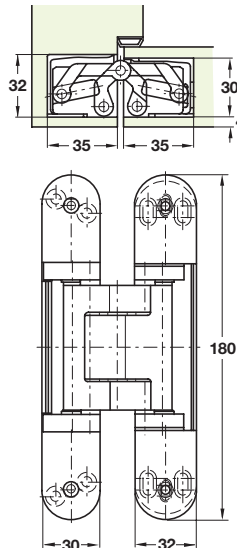

Matt nickel F2 finish shown

D Intumescent kit to suit Tectus 510 hinges

- Upgrades hinge to 30 minute fire rating
- Not for use when retrofit cable set, item **E**, used
- Intumescent material, white, 2 mm thick

Cat. No.	+ 924.02.290
----------	--------------


Order qty: 1 pc **Discontinued**
924.02.290 - No longer available

E Tectus 510 retrofit cable set

- For use with Tectus 510 3D hinge for concealing power line from door leaf to frame
- Comprises:
5 m Cable with cable plug for door leaf
3 m Cable with cable socket for frame
1x Tension spring
2x Compression springs (return springs)
Strain relief clamps and cable ties
Cover plates for door leaf and frame section
- 4 wires: Max. current 4A, max. voltage 48V
- **Please note:** Order 1 cable set for applications with up to 4 wires, order 2 sets for applications with up to 8 wires
- Steel cover plates

Finish	Cat. No.
Matt nickel F2	● 924.03.022
Dull chrome F1	● 924.03.004
Polished nickel	● 924.03.070

Order qty: 1 pc

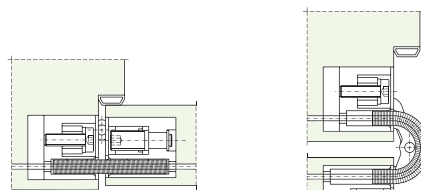

Discontinued
924.03.022 - No longer available
924.03.004 - No longer available
924.03.070 - No longer available



Retrofit cable set shown used with Tectus 510 3D hinge, item C