

Metal Vision Frames

Porthole Frames, Glass, Glazing Tape and Liners

The circular vision frames with their clean lines enhance the appearance of any door. This flush fitting design is available in stainless steel or chrome pearlite silver* plating on steel.

Ideal for luxury office suites, corridor doors, classrooms etc.

The fixings are around the bevel and not directly on the face - improving the visual appearance. The flush fitting rim is ideal for 'clean room' situations.

Security fixing on one side only prevents unauthorised tampering yet, in the event of glass breakage, allows easy replacement.

Available in 4 different door cut-outs: 250 mm, 350 mm, 450 mm and 550 mm.

Varying glass types are available for each of the sizes, together with glazing tapes and liners.


Slimport vision frames are fully tested to one hour by Warrington Fire Research Centre in accordance with BS 476: Part 20: 1987

Frames to suit 47-51 mm and 52-56 mm door thicknesses are available to order, subject to quantity - information on request



A Circular metal porthole frame

- To suit **42-46 mm** door thickness
- Fixing geometry ensures that the two self attaching rings pull together to sit flush to the door panel and allow for concealed fixings to one side
- Minimum installation from edge of door should be no less than 125 mm
- Fits 6 and 6.4 mm glass at Ø 225, Ø 323 mm, Ø 425 and Ø 525 mm
- Fixings included
- Glass to suit must be ordered separately, item **B**
- Glazing tape and liners should be ordered separately
- *Chrome pearlite silver finish (matches SAA)- not suitable for external applications

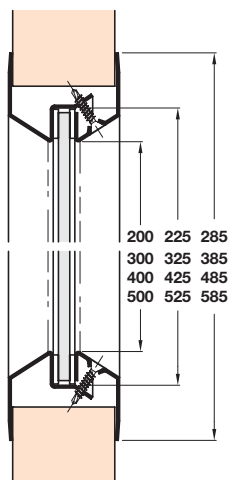

4

Door cut size	Ø 250 mm	Ø 350 mm	Ø 450 mm	Ø 550 mm
Clear vision size	Ø 200 mm	Ø 300 mm	Ø 400 mm	Ø 500 mm
Satin stainless steel	973.99.000	973.99.010	973.99.020	973.99.030
Polished stainless steel	973.99.001	973.99.011	973.99.021	973.99.031
Chrome pearlite silver*	973.99.002	973.99.012	973.99.022	973.99.032

Order qty: 1 pc

B Glass

- To suit circular porthole frame **A**
- Available for fire and non-fire rated doors
- Fire resistant and non-fire rated frosted glass, as well as frosted glass with sex and toilet symbols, or company logos available to order, subject to quantity

Glass type	Glass thickness	Ø 223 mm	Ø 323 mm	Ø 423 mm	Ø 523 mm
Laminated clear safety (non-fire rated)	6.4 mm	973.99.200	973.99.210	973.99.220	973.99.230
Clear GWP safety (1/2 x 1hr fire rated)	6 mm	973.99.202	973.99.212	973.99.222	973.99.232
Clear fire resistant (1/2 x 1hr fire rated)	6 mm	973.99.203	973.99.213	973.99.223	973.99.233
Laminated frosted safety (non-fire rated)	6.4 mm	973.99.201	973.99.211	973.99.221	973.99.231

Order qty: 1 pc


C Glazing tape

- For fitting to both sides of glass before it is sandwiched between the porthole frames
- Available in three thicknesses to suit varying door and glass thicknesses
- For non-fire rated doors
- Black closed cell polyvinyl chloride foam with PSA backing

Size	Roll length	Cat. No.
0.8 x 9.5 mm	61000 mm	973.99.106
0.8 x 9.5 mm	50000 mm	973.99.105
1.6 x 9.5 mm	61000 mm	973.99.100
1.6 x 9.5 mm	40000 mm	973.99.103
3.2 x 9.5 mm	30000 mm	973.99.101
3.2 x 9.5 mm	20000 mm	973.99.104

Order qty: 1 pc

Item C.
 Catalogue shows... Correct lengths are:
 'Roll length' 'Roll length'
 6100 mm 61000 mm
 5000 mm 50000 mm
 6100 mm 61000 mm
 4000 mm 40000 mm
 3000 mm 30000 mm
 2000 mm 20000 mm

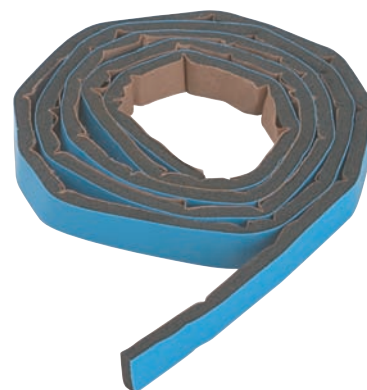

TCH-A1 2008, HUK. Dimensional data not binding. We reserve the right to alter specifications without notice.

26.08.08/1*