

A Sanding disc, Ø 150 mm

- Gold aluminium oxide
- Self adhesive or velcro backing
- Power sanding, for paint, plaster, fillers, particle boards and softwoods
- Resin over resin Progressive Bond™ provides superior grain support
- Special stearate coating maximises resistance to clogging and loading
- Flexible weight latex backing combines toughness with flexibility

Grit	Velcro backing	Self adhesive
40	-	005.52.151
60	-	005.52.152
80	005.52.171	005.52.153
100	005.52.172	005.52.154
120	005.52.173	005.52.155
150	005.52.174	005.52.156
180	005.52.175	005.52.157
240	005.52.176	005.52.158
320	005.52.177	005.52.159
400	005.52.178	-
500	005.52.179	-

Order qty: Multiples of 100 pcs




B Sanding disc, Ø 150 mm

- Gold aluminium oxide
- Self adhesive or velcro backing
- Power sanding, for paint, plaster, fillers, particle boards and softwoods
- Resin over resin Progressive Bond™ provides superior grain support
- Special stearate coating maximises resistance to clogging and loading
- Flexible weight latex backing combines toughness with flexibility

Grit	Velcro backing	Self adhesive
40	-	005.33.130
60	-	005.33.131
80	005.52.161	005.33.132
100	005.52.162	005.33.133
120	005.52.163	005.33.134
150	005.52.164	005.33.135
180	-	005.33.136
240	005.52.166	005.33.137
320	005.52.167	005.33.138
500	005.52.169	-

Order qty: Multiples of 100 pcs

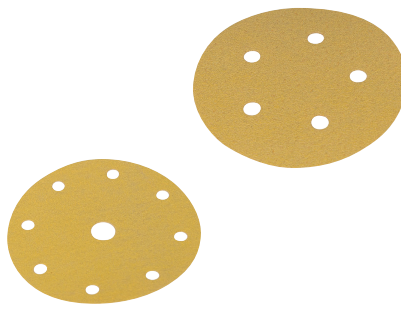

C Sanding disc

Item C.
Catalogue shows...
'6 holes'
Correct text is **9 holes**

- Ø 125 with 5 holes, Ø 150 mm with 9 holes
- Gold aluminium oxide
- Velcro backing
- Power sanding for paint, plaster, filters, particle boards and soft woods
- Resin over resin progressive bond™ provides superior grain support
- Special stearate coating maximises resistance to clogging and loading
- Flexible weight latex backing combines toughness and flexibility

Grit grade	Ø 125 mm	Ø 150 mm
80	005.58.240	005.58.220
100	-	005.58.221
120	005.58.241	005.58.222
150	005.58.242	005.58.223
180	005.58.243	005.58.224
220	005.58.244	-
240	005.58.245	005.58.225
320	005.58.246	005.58.226
400	005.58.247	005.58.227
500	005.58.248	005.58.228

Order qty: Multiples of 100 pcs



D Backing pad

- For surface grinding of metals, cleaning welded joints and deburring where high stock removal rates are required
- Superior performance to fibre sanding disc
- Blue zirconium oxide

Backing pad	Cat. No.
Ø 125 mm, with 5 holes	005.58.202
Ø 150 mm, with 6 holes	005.58.203

Order qty: 1 pc



E Sanding disc, Ø 115 x 22 mm

- For surface grinding of metals, cleaning welded joints and deburring where high stock removal rates are required
- Superior performance to fibre sanding disc
- Blue zirconium oxide

Grit grade	Cat. No.
36	005.33.040
40	005.33.041
60	005.33.042
80	005.33.043

Order qty: 1 pc




F Sanding disc

- For surface grinding of metals, cleaning welded joints and deburring where high stock removal rates are required
- Full resin bonding maximises life for machine sanding operations
- Maroon aluminium oxide

Size	Grit Grade	Cat. No.
Ø 100 x 16 mm	24	005.33.030
Ø 100 x 16 mm	36	005.33.031
Ø 115 x 22 mm	24	005.33.032
Ø 115 x 22 mm	36	005.33.034
Ø 180 x 22 mm	24	005.33.035
Ø 180 x 22 mm	36	005.33.036

Order qty: Multiples of 25 pcs

Photo amended

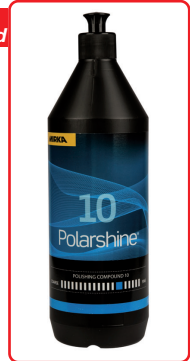

Catalogue shows medium coarse
Correct text is **medium fine**

G Polarshine T10

- The ultimate single compound system
- A **medium fine** polishing compound especially designed for achieving the best result after sanding with Mirka abrasives
- Removes sanding marks permanently
- Suitable for all paint systems
- Silicone free
- Application by machine or hand

Size	Cat. No.
1 litre	005.58.265

Order qty: 1 pc