


Concealed Hinges

Essentials Standard 110° Hinges with Slide on Arms


- Opening angle **110°**, 45 mm cup fixing
- 0 mm crank
- Sprung
- Ø 35 mm cup, 45 mm cup fixing centres
- Screw fixing or dowel fixing cup
- Slide on arms
- Nickel-plated pressed steel cup and arm
- **Mounting plates** for these slide on hinges are shown on page 38
- **Hinge arm cover plates** are shown on page 38

Screw fixing

Dowel fixing

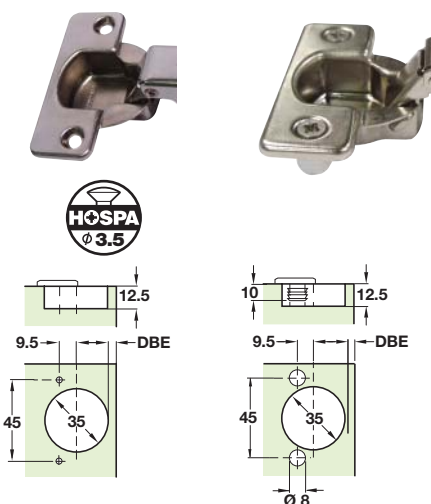

Text 'Soft close compatible on sprung hinges' removed



110°

Slide on

| Crank | Screw fixing | Dowel fixing |
|-------|--------------|--------------|
| 0 | 316.03.602 | 316.03.657 |

Order qty: Multiples of 10 pcs

Mounting screws

- Hospa chipboard screws, raised head, Ø 3.5 mm with cross slots
- Nickel-plated steel




| Length | Cat. No. | Order qty |
|--------|------------|-----------|
| 15 mm | 015.55.639 | 1000 |
| 17 mm | 015.55.648 | 1000 |
| 20 mm | 015.55.657 | 1000 |



Photo and text removed
 'Soft close clip on fitting for sprung hinges shown on page 38'
 Please note: Soft close clip fitting is NOT compatible on sprung hinges

0 Crank

f = Mounting plate thickness

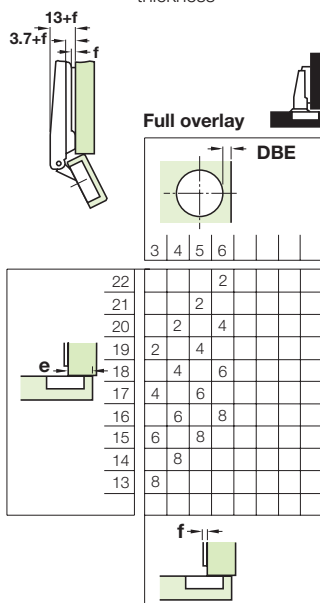

- DBE** = Distance of the bore from the edge of the door
- b** = Thickness of the door
- c** = Required gap
- e** = Coverage of the side (end) by door
- f** = Mounting plate thickness

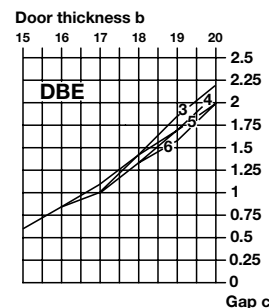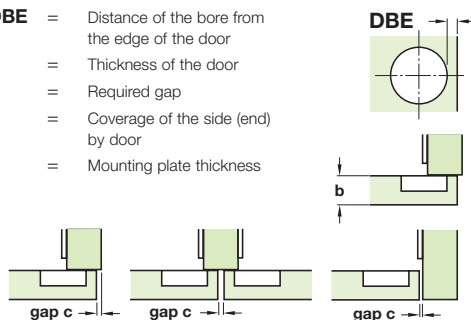

20.10.10/1*