

Guide to spindle types



Plain spindle - No grub screws usually present



Piercing spindle - Grub screw with cylinder end




Slotted spindle - Grub screw with pointed end



Stabil spindle - Grub screw with cylinder end

Stabil half spindle for FSB handles, shown on page 15

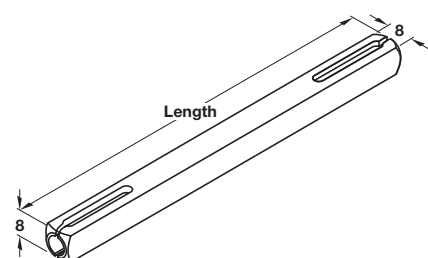


Slotted spindle

- For use with 'Fusital' and other levers
- 8 mm square
- Zinc plated steel

Length	Cat. No.
100 mm	909.94.900
110 mm	909.94.910
120 mm	909.94.920
130 mm	909.94.930

Order qty: 1 pc

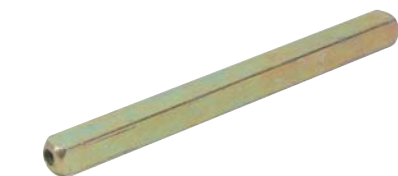

Piercing spindle

- For use with 'StarTec' and other levers
- 8 mm square
- Zinc plated steel

Length	Door thickness	Cat. No.
100 mm	Up to 44 mm	909.46.028
110 mm	Up to 54 mm	909.46.031
130 mm	Up to 64 mm	909.46.035

Order qty: 1 pc



8 mm spindle

Pitts (plain) spindle

- 8 mm square
- Zinc plated steel

Length	Door thickness	Cat. No.
82 mm	Up to 34 mm	911.39.357
120 mm	Up to 44 mm	911.39.376
130 mm	Up to 54 mm	911.39.377
138 mm	Up to 64 mm	911.39.358

Order qty: 1 pc



5 mm spindle

Pitts (plain) spindle

- 5 mm square
- Zinc plated steel

Length	Door thickness	Cat. No.
62 mm	Up to 44 mm	909.00.910
85 mm	Up to 54 mm	909.00.907
138 mm	Up to 64 mm	909.00.962

Order qty: 1 pc



Spindle converter

- To convert spindle to different size
- Bright steel

To convert spindle	Cat. No.
7 mm spindle to 8 mm	909.40.500
8 mm spindle to 10 mm	909.40.502
5 mm spindle to 8 mm	909.40.600

Order qty: 1 pc



FSB piercing grub screw

- For use with FSB lever/knob handles
- Ø 6 mm
- Steel

	Cat. No.
FSB grub screw	909.90.540

Order qty: 1 pc



StarTec piercing grub screw

- For use with StarTec lever/knob handle
- Ø 6 mm
- Steel

	Cat. No.
StarTec grub screw	909.46.090

Order qty: 1 pc



Standard piercing grub screw

- For use with lever/knob handle
- Ø 6 mm
- Steel

	Cat. No.
Standard grub screw	909.00.958

Order qty: 1 pc