


### 'Aquamac' door and window seals

- Lifetime guarantee
- Conforms to BS 644
- BBA approved
- Abrasion resistant liner over sealing foam





### 'Aquamac 89' door seal

- Requires kerf slot 2.7 x 6 mm
- Recommended seal gap **5-13 mm**
- Abrasion resistant liner over sealing foam

Length	White	Brown
2.1 m	950.20.237	950.20.231

Order qty: 1 pc




### 'Aquamac 63' door seal

- Requires kerf slot 2.7 x 6 mm
- Recommended seal gap **3.4-5.4 mm**
- Abrasion resistant liner over sealing foam

Length	White	Brown
300 m	950.20.207	950.20.201

Order qty: 1 pc




### 'Aquamac 124' window seal

- Requires kerf slot 3.0 x 7 mm
- Recommended seal gap **5.0-7.3 mm**
- Abrasion resistant liner over sealing foam

Length	White	Brown
125 m	950.20.157	950.20.151

Order qty: 1 pc




### 'Aquamac 21' window seal

- Requires kerf slot 2.7 x 6 mm
- Recommended seal gap **5.0-7.5 mm**
- Abrasion resistant liner over sealing foam

Length	White	Brown
250 m	950.20.217	950.20.211

Order qty: 1 pc

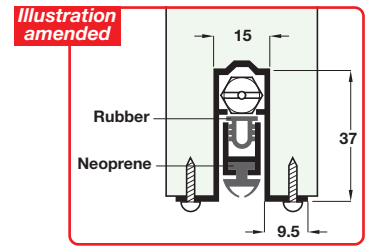


### Retractable door seal, full mortice

- Regular duty
- For timber or metal doors
- Unhanded
- For seal gap **up to 12.7 mm**
- May be trimmed on site by 152 mm to fit
- Aluminium carrier with solid neoprene seal


**Catalogue shows For gaps up to 25 mm Correct information is For seal gap up to 12.7 mm**

Length	914 mm	1067 mm
Cat. No.	950.07.544	950.07.546

Order qty: 1 pc



The door requires two grooves to accommodate the profile. The bulge of the profile is determined by the interval between the gaps

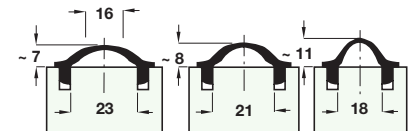


### Hawa Sealing and buffer profile

- Installed in two grooves in the front edge of sliding doors,
- Profile strip absorbs impact noise and prevents possible finger injury from forceful closing
- Seals the door when closed
- Brown, black or white neoprene

Finish	Brown	Black	White
Cat. No.	940.00.521	940.00.530	940.00.549

Order qty: 1 roll (= 5 m lengths)

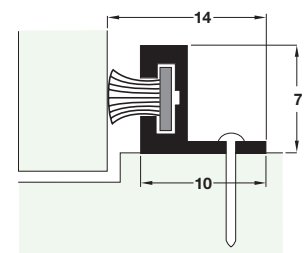

### Slide-pile weather strip

- Suitable for both hinged and sliding doors, windows
- Inward or outward opening
- Suitability: Residential, commercial and public, industrial and normal site conditions
- Resilient polypropylene pile in aluminium carrier
- Stainless steel pin fixing included
- Aluminium carrier, polypropylene pile seal

	Cat. No.
Weather strip	950.17.270

Order qty: 1 pc (= 2134 mm length)

TCH 2013. © Häfele U.K. Ltd 2013. Dimensional data not binding. We reserve the right to alter specifications without notice.