


LOOX COMPATIBLE 350mA LED CEILING LIGHTS

Loox Compatible 350mA LED STORM ceiling light, Ø 140 mm, with 20° swivel adjustment



IP20

- > For recess mounting, for installation in Ø 120 mm hole
- > With 20° swivel adjustment
- > Press-fit clip fixing
- > Current: 350mA. Wattage: 9W
- > With 2.0 m lead with Loox 350mA connector
- > Aluminium, white finish
- > Order qty: 1 pc

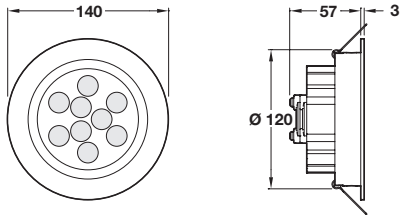

Distance	60°	3000 K
500 mm		7000 Lx
1000 mm		1300 Lx
2000 mm		450 Lx



Light swivels 20°

Output:	3000 K
Light colour:	Warm white
Number of diodes:	9
Light output (Lm):	630
Wattage (W):	9W
Efficacy (Lm/W):	70
Colour Rendering Index:	80




Finish	3000 K
White	833.06.380

Loox Compatible 350mA LED K-3 ceiling light, with 20° swivel adjustment



IP20

- > For recess mounting, for installation in Ø 70 mm hole
- > With 20° swivel adjustment
- > Press-fit clip fixing
- > Current: 350 mA. Wattage: 3W
- > With 2.0 m lead with Loox 350mA connector
- > Aluminium
- > Order qty: 1 pc

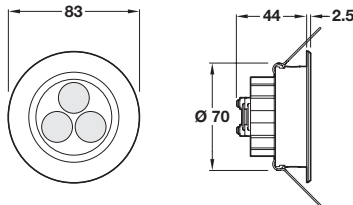

Distance	70°	3000 K
500 mm		2200 Lx
1000 mm		450 Lx
2000 mm		130 Lx



Light swivels 20°

Output:	3000 K
Light colour:	Warm white
Number of diodes:	3
Light output (Lm):	210
Wattage (W):	3W
Efficacy (Lm/W):	70
Colour Rendering Index:	80



Finish	3000 K
Aluminium	833.06.350



- > Order Loox 350mA driver and mains lead separately, shown on page 132
- > Order switch separately, switches shown on pages 134-136