


Loox Compatible 350mA LED L-3 ceiling swivel light, with 20° swivel adjustment



IP20

- > For recess mounting, for installation in \varnothing 70 mm hole
- > With 20° swivel adjustment
- > Press fit fixing
- > Current: 350 mA. Wattage: 3W
- > With 2.0 m lead with Loox 350mA connector
- > Aluminium
- > Order qty: 1 pc

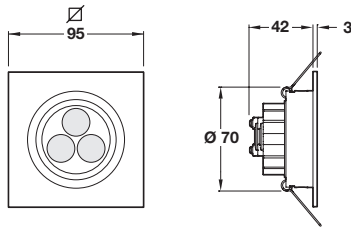

Output:	3000 K
Light colour:	Warm white
Number of diodes:	3
Light output (Lm):	210
Wattage (W):	3W
Efficacy (Lm/W):	70
Colour Rendering Index:	80

Distance	70°	3000 K
500 mm		2200 Lx
1000 mm		450 Lx
2000 mm		130 Lx



Light swivels 20°




Finish	3000 K
Aluminium	833.06.360

Loox Compatible 350mA LED CORE ceiling swivel light, with 20° swivel adjustment



IP20

- > For recess mounting, for installation in \varnothing 48-50 mm hole
- > With 20° swivel adjustment
- > Press fit fixing
- > Current: 350 mA. Wattage: 1W
- > With 2.0 m lead with Loox 350mA connector
- > Aluminium, aluminium finish
- > Order qty: 1 pc

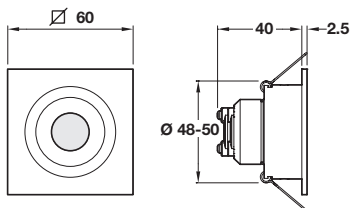

Output:	3000 K
Light colour:	Warm white
Number of diodes:	1
Light output (Lm):	140
Wattage (W):	1W
Efficacy (Lm/W):	140
Colour Rendering Index:	80

Distance	60°	3000 K
500 mm		1670 Lx
1000 mm		380 Lx
2000 mm		100 Lx



Light swivels 20°



Finish	3000 K
Aluminium	833.06.340



- > Order Loox 350mA driver and mains lead separately, shown on page **132**
- > Order switch separately, switches shown on pages **134-136**