




### Loox LED 3007 Profile light for doors and drawers

Slim, space saving profile light with built-in infrared sensor, available in two lengths, especially suitable for illuminating drawers.

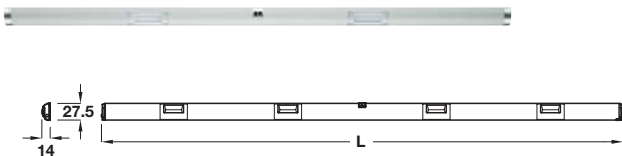

### Loox 24V LED 3007 Profile light, 563 / 863 mm

- For surface mounting, clips into brackets
- With built-in infrared switch - switches light on or off when door or drawer opened or closed
- Screw fixing to carcase sides, brackets and fixings included to suit 16/18/19 mm board thickness
- Voltage: 24V. Wattage: See table below
- With 2.0 m lead with Loox 24V connector
- Silver coloured anodized aluminium
- **Note this light is not dimmable**
- **Order Loox 24V driver and mains lead separately, shown on page 60**



Length	563 mm	863 mm
Cat. No.	833.76.122	833.76.125


Order qty: 1 pc

Output:	5000 K	
Light colour:	Cool white	
Length:	563 mm	863 mm
Number of diodes:	6	12
Light output (Lm):	81	162
Wattage (W):	4	8
Efficacy (Lm/W):	20	20
Colour Rendering Index:	70	70
Brightness at 250 mm distance:	300 Lx	300 Lx
Brightness at 500 mm distance:	170 Lx	170 Lx
Brightness at 750 mm distance:	100 Lx	100 Lx
Brightness at 1000 mm distance:	55 Lx	55 Lx



### Loox LED 3009 Profile light for drawers or cabinets

Low profile surface mounted light available in two versions; with built-in infrared sensor switch for door/drawer applications or without switch for under cabinet lighting.

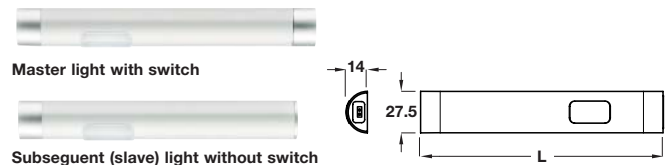

Master light with switch

Subsequent (slave) light without switch

### Loox 24V LED 3009 Profile light, 161 / 150 mm

- For surface mounting, screw fixing, fixings included
- Master light with integrated, switchable sensor switch or door sensor switch
- Max. 15 slave lights can be connected in series to 1 master, slave lights can also be connected directly to the driver
- Voltage: 24V. Wattage: 1.9W
- With 2.0 m lead with Loox 24V connector
- Silver coloured anodized aluminium
- **Note this light is not dimmable**
- **Order Loox 24V driver and mains lead separately, shown on page 60**



With/without switch	With (master)	Without (slave)
Length	161 mm	150 mm
Cat. No.	833.76.110	833.76.111

Order qty: 1 pc

Output:	5000 K	
Light colour:	Cool white	
Length:	161 mm	150 mm
Number of diodes:	3	
Light output (Lm):	30	
Wattage (W):	1.9W	
Efficacy (Lm/W):	16	
Colour Rendering Index:	70	
Brightness at 250 mm distance:	200 Lx	
Brightness at 500 mm distance:	60 Lx	
Brightness at 750 mm distance:	30 Lx	
Brightness at 1000 mm distance:	10 Lx	

TCH 2013. © Häfele U.K. Ltd 2013. Dimensional data not binding. We reserve the right to alter specifications without notice.