

LOOX 24V LED 3011 FLEXIBLE STRIP LIGHT



A 24V version of LED 2011 but with the additional option of corner connectors to give more functionality to this plug and play system.




Loox 24V LED 3011 flexible strip light, 8 mm



IP20

- > For surface mounting, self adhesive
- > 330 or 2000 mm length
- > Can be shortened every 165 mm
- > Voltage: 24V. Wattage: See table below
- > White plastic
- > Order qty: 1 pc

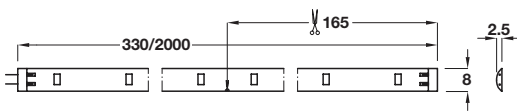

Distance	120°	3000 K	4000 K	5000 K
250 mm		284 Lx	247 Lx	272 Lx
500 mm		136 Lx	119 Lx	132 Lx
750 mm		91 Lx	72 Lx	81 Lx
1000 mm		57 Lx	50 Lx	56 Lx

Output	3000 K	4000 K	5000 K
Light colour	Warm white	Cool white	Cool white
Colour Rendering Index:	90	90	86
Length	330 mm	2000 mm	
Number of diodes:	12	72	
Light output (Lm):	44	282	
Wattage (W):	0.9	5.6	
Efficacy (Lm/W):	49	50	



Length	3000 K	4000 K*	5000 K
330 mm	833.77.020	833.77.030	833.77.040
2000 mm	833.77.021	833.77.031	833.77.041




> Order connecting lead Cat. No. 833.77.796 separately, shown on page **85**



> Order Loox 24V driver and mains lead separately, shown on page **98**
 > Order switch separately, switches shown on pages **134-136**

Loox LED 3011 connecting lead

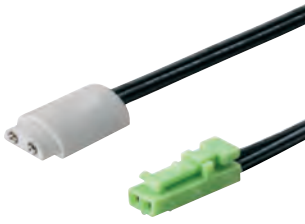

- > Must be ordered separately for connecting flexible strip light to driver
- > Black plastic
- > Order qty: 1 pc



> Must be ordered separately for connecting Loox LED 3011 strip light to driver

Length	2000 mm
Cat. No.	833.77.796


Loox LED 3011 interconnecting lead



- > 50 mm version for corner connection
- > 500 / 1500 mm versions for connecting strips in continuous run
- > Black plastic
- > Order qty: 1 pc

Length	50 mm	500 mm	1500 mm
Cat. No.	833.77.790	833.77.791	833.77.792

Loox 24V LED 3011 corner connector strip lights

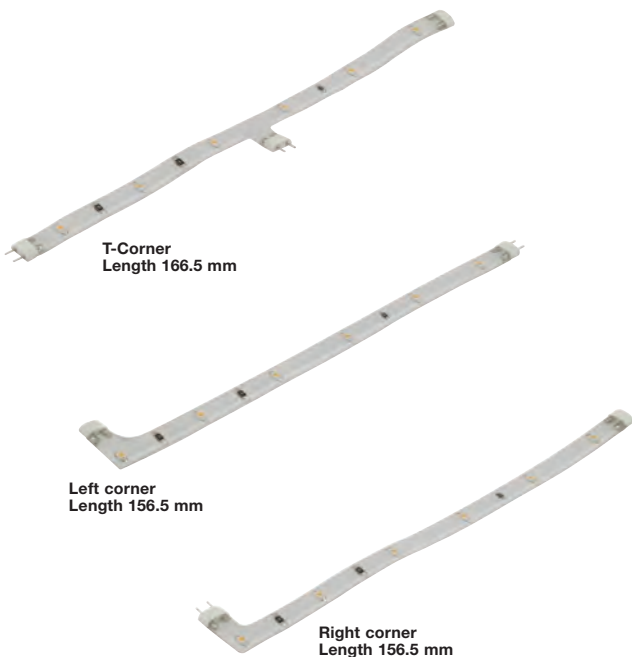

- > For connecting LED 3011 flexible strip lights
- > T-connector has 2 male and 1 female connector
- > Corner connector has 1 male and 1 female connector
- > With 6 diodes
- > Voltage: 24V. Wattage: 0.4W
- > White plastic
- > Order qty: 1 pc



Colour temperature	T-Corner	Left corner	Right corner
3000 K	833.77.050	833.77.053	833.77.056
4000 K	833.77.051	833.77.054	833.77.057
5000 K	833.77.052	833.77.055	833.77.058